

RLS2000

Perfect 360° illumination at the scene of an emergency.



The new, completely flexible LED lighting head of the RLS2000 is another plus for this popular lighting system in terms of functionality. Everything is possible with the multi-functional lighting head that moves in all directions: from a powerful spotlight for search and rescue operations to 360° floodlight. Even a combination of the two is possible.

These advantages make the RLS2000 the ideal work light in every operational situation:


- **3 flexible LED light panels:** Provide 360° illumination as well as a variety of application possibilities in operation. The angle of inclination of each panel can be individually adjusted to any position.
- **Changeable focus:** For light output adapted to the respective situation – from long light beam to wide floodlight
- **Dimming function:** The work light can be adapted as needed with 6 different levels
- **High-power LED technology:** Maximum efficiency for the best light output
- **Variable light output:** The three panels can be individually switched on and off and assigned various brightness levels
- **Flashing signal light:** The RLS2000 is equipped with a flashing signal light in 5 different colors (red, green, yellow, blue, and white)



360° illumination



Targeted illumination

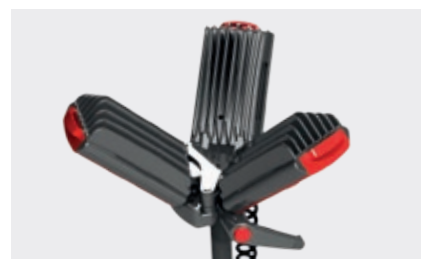

360° illumination pointing downwards

RLS2000

Perfect 360° illumination at the scene of an emergency.



Technical data

Battery	<ul style="list-style-type: none">Rechargeable 12/24 V (included with delivery) or 230 V (optional)12 V lead gel battery, 22 Ah
Performance	<ul style="list-style-type: none">8 h operating time at 100 % power of the panel1 panel has just about the same light output as the well-known RLS1000Color temperature: 6,500 K (equivalent to daylight)High-power LEDs with special lens system plus multicolor LEDs6 adjustable brightness levels with 150 % power boost for 10 minutesChangeable focus
Integrated accessories	<ul style="list-style-type: none">2 integrated fold-out feet for better stability on uneven surfaces4 quick-lock extension poles (included in delivery) for a light head height of up to 1.80 m1 12/24 V charging cable with cigarette lighter connector, approx. 2 m (included in delivery)
Dimensions / packaging dimensions:	390 x 195 x 255 mm
Weight	approx. 13 kg

Order data

312305	RLS2000 LED lighting system
---------------	-----------------------------

Accessories

31230801	230 V power adapter
31230805	3 m extension cord for light head height of 5 m with larger tripods
856486-001	Support bracket for LED lighting systems in vehicles
31230804	DIN tripod adapter

A practical accessory is the DIN tripod adapter (31230804), with which the LED lighting head can be attached to any tripod with the standard DIN mounting attachment. A 230 V network adapter (31230801), an extension cord for a light head height of 5 m with larger tripods (31230805), and a forming cup for mounting in the vehicle (856486-001) are also available as accessories.



Contact

Rosenbauer International AG
Product Division Fire & Safety Equipment
Paschinger Straße 90
4060 Leonding, Austria
Tel.: + 43 732 6794-0
Fax: + 43 732 6794-77
office@rosenbauer.com

www.rosenbauer.com

 www.facebook.com/rosenbauergroup

Text and images non-binding. The images may depict special editions that are only available at an additional charge. Subject to change due to technical advances.